


For Aluminum



ZrN Coated

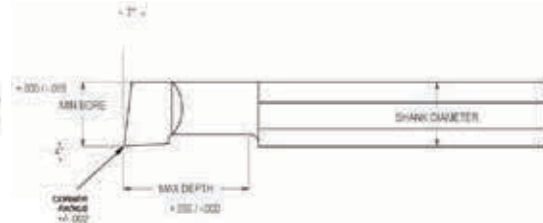

Carbide Boring Bars for Aluminum

Minimum Bore	Max. Depth	Radius	OAL	Shank ϕ	ZrN Coated Part #
.120	.250	.007	2	1/8	RBB191200
	.500	.007	2	1/8	RBB191250
	.800	.007	2	1/8	RBB191290
.180	.500	.007	2-1/2	3/16	RBB191300
	.750	.007	2-1/2	3/16	RBB191350
	1.250	.007	2-1/2	3/16	RBB191390
.240	.500	.007	2-1/2	1/4	RBB191400
	.750	.007	2-1/2	1/4	RBB191450
	1.250	.007	2-1/2	1/4	RBB191490
.370	.500	.015	2-1/2	3/8	RBB191500
	.750	.015	2-1/2	3/8	RBB191550
	1.250	.015	2-1/2	3/8	RBB191590
.490	.750	.015	3	1/2	RBB191600
	1.000	.015	3	1/2	RBB191650
	1.500	.015	3	1/2	RBB191690

Carbide Bars



Speeds, feeds and tech info pages 542-543.