




Uncoated

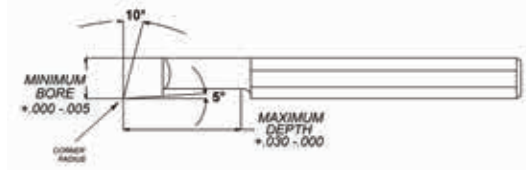


Carbide Boring Bars for Plastic

Minimum Bore	Offset	Max. Depth	Neck ø	OAL	Shank ø	Uncoated Part #
.120	.030	.250	.090	2	1/8	RBB911000
	.030	.500	.090	2	1/8	RBB911010
	.030	.800	.090	2	1/8	RBB911020
.180	.045	.500	.135	2-1/2	3/16	RBB911030
	.045	.750	.135	2-1/2	3/16	RBB911040
	.045	1.250	.135	2-1/2	3/16	RBB911050
.240	.040	.500	.200	2-1/2	1/4	RBB911060
	.040	.750	.200	2-1/2	1/4	RBB911070
	.040	1.250	.200	2-1/2	1/4	RBB911080
.370	.070	.500	.300	2-1/2	3/8	RBB911090
	.070	.750	.300	2-1/2	3/8	RBB911100
	.070	1.250	.300	2-1/2	3/8	RBB911110
.490	.080	.750	.410	3	1/2	RBB911120
	.080	1.000	.410	3	1/2	RBB911130
	.080	1.500	.410	3	1/2	RBB911140



Uncoated



Carbide Long-Reach Boring Bars

Minimum Bore	OAL	Corner Radius	Shank ø	Uncoated Part #	AlTiN Coated Part #
.220	4	.005	3/16	RBB041095	RBB041095A
.280	4	.007	1/4	RBB041100	RBB041100A
.350	4	.007	5/16	RBB041110	RBB041110A
.420	6	.010	3/8	RBB041120	RBB041120A
.560	6	.010	1/2	RBB041130	RBB041130A
.700	6	.015	5/8	RBB041140	RBB041140A

Carbide Bars

