




Uncoated



Carbide Thread Relief Bars						
Minimum Bore	Flat Width	Offset	Max Depth	OAL	Shank ϕ	Uncoated Part #
.125	.060	.045	.300	2	1/8	RTB461100
	.060	.045	.400	2	1/8	RTB461105
.187	.080	.050	.400	2-1/2	3/16	RTB461110
	.080	.050	.800	2-1/2	3/16	RTB461115
.250	.095	.060	.500	2-1/2	1/4	RTB461120
	.095	.060	1.000	2-1/2	1/4	RTB461125
.312	.095	.080	.750	2-1/2	5/16	RTB461130
	.095	.080	1.250	2-1/2	5/16	RTB461135
.375	.130	.120	.750	2-1/2	3/8	RTB461140
	.130	.120	1.250	2-1/2	3/8	RTB461145
.500	.160	.130	1.000	3	1/2	RTB461150
	.160	.130	1.500	3	1/2	RTB461155

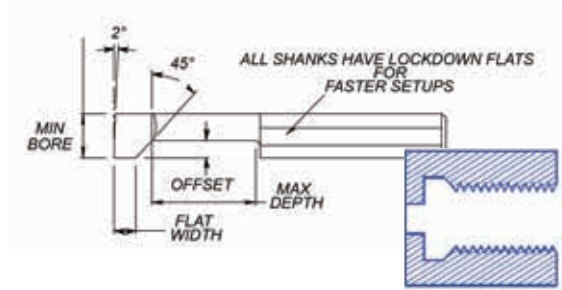